
casmocable
CABLES FOR EXTREMES

UL 3529

-60°C to +150°C, 600V

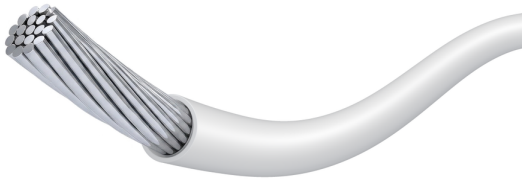

Construction
Conductor: Tinned Copper or Bare Copper
Insulation: Extruded · Silicone rubber

Thermal Characteristics
Operating Temperature: -60°C to +150°C

Electrical Characteristics
Operating Voltage: 600V

Application
Internal wiring: Internal wiring of appliances and electronic equipment.
High-temperature equipment: High-temperature lead wiring for industrial controls, lighting fixtures, and heating appliances.

General Characteristics
Extreme Flexibility: Ultra-supple silicone rubber insulation stays flexible from low ambient temperatures up to rated heat.
Thermal & Aging Resistance: Excellent resistance to thermal aging, ozone, corona, and moisture in high-heat environments.

Standards & Approvals
UL 758: UL 758 Appliance Wiring Material, Style 3529.
CSA C22.2 No. 210: cUL Appliance Wiring Material, Style 3529.

Fire Performance
Fire Retardant: VW-1 / FT1 / FT2

RoHS COMPLIANT · REACH COMPLIANT

CASMO Part No.	Conductor				Insulation		Nom. O.D. (mm)	Max. DCR @20°C (Ω/km)	Nom. Cable Weight (kg/km)
	Conductor Size (AWG)	No. Of Strands	Nom. Strand Dia. (mm)	Nom. Conductor Dia. (mm)	Nom. Ins. Thickness (mm)	Min. Ins. Thickness (mm)			
3110326/7-TS2-XX	26	7	0.16	0.48	0.76	0.69	2.04	150	5.31
3110324/11-TS2-XX	24	11	0.16	0.61	0.76	0.69	2.17	94.2	6.69
3110324/19-TS2-XX	24	19	0.127	0.64	0.76	0.69	2.17	94.2	6.91
3110322/7-TS2-XX	22	7	0.254	0.76	0.76	0.69	2.36	59.4	8.74
3110322/17-TS2-XX	22	17	0.16	0.76	0.76	0.69	2.36	59.4	8.74
3110320/19-TS2-XX	20	19	0.2	1	0.76	0.69	2.52	36.7	11.84
3110320/26-TS2-XX	20	26	0.16	0.94	0.76	0.69	2.52	36.7	11.13
3110320/41-TS2-XX	20	41	0.127	0.94	0.76	0.69	2.52	36.7	11.13
3110318/19-TS2-XX	18	19	0.254	1.27	0.76	0.69	2.79	23.2	16.87
3110318/41-TS2-XX	18	41	0.16	1.18	0.76	0.69	2.79	23.2	15.54
3110316/26-TS2-XX	16	26	0.254	1.49	0.76	0.69	3.09	14.6	22.41
3110316/65-TS2-XX	16	65	0.16	1.5	0.76	0.69	3.09	14.6	22.59
3110314/41-TS2-XX	14	41	0.254	1.88	0.76	0.69	3.44	8.96	32.5
3110314/104-TS2-XX	14	104	0.16	1.89	0.76	0.69	3.44	8.96	32.73
3110312/65-TS2-XX	12	65	0.254	2.36	0.76	0.69	4	5.64	48.72
3110312/168-TS2-XX	12	168	0.16	2.37	0.76	0.69	4	5.64	49

Table Notes

* Part No. code: XX = colour code — BK Black, WH White, RD Red, GN Green, BN Brown, BL Blue, OR Orange, YW Yellow, VT Violet, GY Grey, PK Pink, TN Tan, CL Clear.

† "-TS2-" = tinned copper conductor with FT2 flame rating (standard). "-TS1-" = tinned copper conductor with VW-1 / FT1 flame rating (optional).

Please confirm application-specific requirements with CASMO before ordering. Specifications are subject to change; please ensure you are using the latest revision.

© CASMO CABLE LLC. All rights reserved.