


CASUSTAN™ EV MC
FHLR2GCB2G
-40°C to +180°C

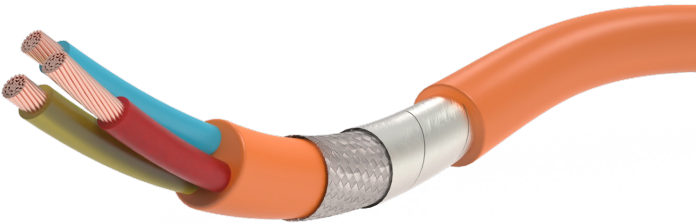

Construction

Type: high voltage shielded and multicore cable
Core: flexible or extra flexible bare copper
Insulation: silicone rubber
Electrical screen: aluminum/PET tape
Shielding: tin-plated copper braid
Sheath: silicone rubber

Production

Range width: 1.5 / 2.5 / 4 / 6 mm², with 2 / 3 / 4 / 5 conductors (other cross sections or constructions on request)
Color: Orange RAL2003
Options: Please consult us for any special requirements

Application

Automotive: high voltage multicore cables for e-mobility power applications. Several benefits: high flexibility, high-temperature resistance, halogen-free, flame retardant, and dual shielding. The best product for your electrical power train of hybrid and electrical vehicles.

General characteristics

Operating environment: good resistance to thermal shock
Weather conditions: good resistance to UV
Chemical behaviors: good resistance to aggressive chemical environments
Humidity: excellent resistance to humidity
Mechanical behaviors: excellent flexibility

Thermal characteristics

Continuous operating temperature: -40°C to +180°C

Electrical characteristics

Operating Voltage: 600 VAC / 900 VDC , 1000 VAC / 1500 VDC
Test voltage: 5000V

Approvals – Standards

Automotive: ISO 6722-1
Halogen free: IEC 60754-2 / EN 60754-2

Casmo Part No.	Conductor cross-section area		Conductor Diameter				Outer Sheath Diameter				Linear core resistance at 20°C	Weight Approx
	NO.	(mm ²)	(in)	(mm)	(mm)	(mm)	(in)	(mm)	(mm)	(mm)	(Ω/ km)	
8120101	2 x	1.5	0.09	-0.01	2.4	-0.3	0.33	-0.02	8.5	-0.6	13	120
8120102	3 x	1.5	0.09	-0.01	2.4	-0.3	0.36	-0.02	9.1	-0.6	13	140
8120103	4 x	1.5	0.09	-0.01	2.4	-0.3	0.38	-0.02	9.7	-0.6	13	165
8120104	5 x	1.5	0.09	-0.01	2.4	-0.3	0.41	-0.02	10.3	-0.6	13	186
8120105	2 x	2.5	0.12	-0.01	3.0	-0.3	0.39	-0.02	9.9	-0.6	7.8	160
8120106	3 x	2.5	0.12	-0.01	3.0	-0.3	0.41	-0.02	10.4	-0.6	7.8	186
8120107	4 x	2.5	0.12	-0.01	3.0	-0.3	0.44	-0.02	11.1	-0.6	7.8	223
8120108	5 x	2.5	0.12	-0.01	3.0	-0.3	0.48	-0.02	12.1	-0.6	7.8	271
8120109	2 x	4.0	0.15	-0.01	3.7	-0.3	0.44	-0.02	11.3	-0.6	4.8	220
8120110	3 x	4.0	0.15	-0.01	3.7	-0.3	0.48	-0.02	12.1	-0.6	4.8	268
8120111	4 x	4.0	0.15	-0.01	3.7	-0.3	0.52	-0.02	13.3	-0.6	4.8	330
8120112	5 x	4.0	0.15	-0.01	3.7	-0.3	0.57	-0.02	14.5	-0.6	4.8	410
8120113	2 x	6.0	0.17	-0.01	4.3	-0.3	0.50	-0.02	12.8	-0.6	3.2	290
8120114	3 x	6.0	0.17	-0.01	4.3	-0.3	0.56	-0.02	14.1	-0.6	3.2	390
8120115	4 x	6.0	0.17	-0.01	4.3	-0.3	0.59	-0.02	15.1	-0.6	3.2	453
8120116	5 x	6.0	0.17	-0.01	4.3	-0.3	0.64	-0.02	16.3	-0.6	3.2	540

COPYRIGHT
This document is protected under copyright law and is the property of Casmo Cable. Data contained herein is confidential to Casmo Cable and this document and/or any part of the data contained herein may not be copied, duplicated, or released for the manufacturing or sale of equipment outside of Casmo Cable or any affiliates without the prior written authorization of Casmo Cable

CAUTION
The information included in this catalog is intended as a guideline only. For applications that require tight tolerances, please contact Casmo Cable for dimensional verification. Information herein is believed to be accurate as of the publication date; however, if an error exists it is unintentional and Casmo Cable is not responsible for any claim traceable to such error.